



SHOULDER FOR TANGENT PAVEMENT

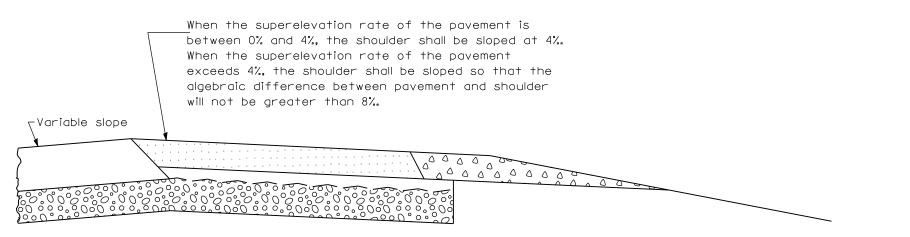

SHOULDER FOR SUPERELEVATED PAVEMENT (OUTSIDE OF CURVE)

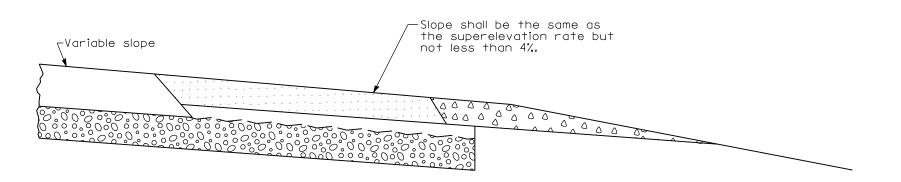

SHOULDER FOR SUPERELEVATED PAVEMENT (INSIDE OF CURVE)

DATE	REVISIONS	
1-1-07	Switched to Hot-Mix	
	Asphalt (HMA)	
	terminology.	
1-1-97	Renum. Standard 2430-1.	┝

shoulders of superelevated pavement.

All dimensions are in millimeters (inches)

Except as noted or shown the dimensions

GENERAL NOTES

and notes specified for the shoulder of tangent pavement are typical for the

unless otherwise shown.

HMA SHOULDER
ADJACENT TO
FLEXIBLE PAVEMENT

STANDARD 482001-01

Illinois Department of Transportation				
PASSED January 1. 2007 Sant 25 d X ENGINEER OF POLICY AND PROCEDURES	UBUNSSI			
APPROVED <u>January 1.</u> 2007	1-1-97			